

**Reliability Modelling of a Computer System with Independent H/W and S/W Failures
Subject to Maximum Operation and Repair Times**

Ashish Kumar^{*}, S. C. Malik^{*} and M. S. Barak^{**}

^{*}Department of Statistics, M.D. University, Rohtak-124001, Haryana, India

^{**}Pt. NRS Govt. College, Rohtak-124001, Haryana, India

(Received on: 03-07-12; Accepted on: 25-07-12)

ABSTRACT

In this paper, some reliability measures of a computer system of two cold standby identical units having hardware and software components are obtained using semi- Markov process and regenerative point technique. For this purpose, a reliability model is developed considering independent h/w and s/w failures. There is a single server who visits the system immediately to do preventive maintenance, repair and replacement of the components upon their failures. The unit undergoes for preventive maintenance after a maximum operation time at normal mode. If repair of the component is not possible up to a pre-specific time (called Maximum Repair Time), the components are replaced by new one with some replacement time. However, only replacement of the software components by new one is made after failures. The failure time of the components follow negative exponential distribution while the distributions of preventive maintenance, repair and replacement time are taken as arbitrary with different probability density functions. The graphical behaviour of the results has also been shown for a particular case to improve the importance of the study.

Key Words: Computer System, H/W and S/W Failure, Maximum Operation and Repair Time, Preventive Maintenance, Reliability and Economic Measures.

2000 Mathematics Subject Classification: 90B25 and 60K10.

1. INTRODUCTION

As a result of the rapid advance technological advances in microelectronics and micro processors, problems of reliability have changed from those involving hardware to those involving software. Today, a large literature exists in the area of hardware reliability and software reliability. However, most of the researchers in these areas have been limited to the consideration of either the hardware subsystem alone or the software subsystem alone. A few researcher including Friedman and Tran [1992] and wilke et al. [1995] tried to establish a combined reliability model for the whole system including both H/W and S/W.

There are many complex systems such as computer systems in which hardware and software components work together to provide computer functionality. The continued operation and ageing of these systems gradually reduce their performance, reliability and safety. And, a breakdown of such systems is costly, dangerous and may create confusion in our society. It is, therefore, of great importance to operate such systems with high reliability. It is proved that / It is proved that preventive maintenance can slow the deterioration process of a repairable system and restore the system in a younger age or state. Thus, the method of preventive maintenance can be used to improve the reliability and profit of system. Recently, Malik et. al [2009] and Malik and Anand [2010] have proposed reliability models for complex systems including a computer system introducing the concept of preventive maintenance of the unit after a maximum operation time. Further, the reliability of a system can be increased by making replacement of the components by new one in case repair time is too long i.e., if it extends to a prespecific time. Singh and Agrafiotis [1995] analyzed stochastically a two-unit cold standby system subject to maximum operation and repair time.

In view of the above and considering the practical importance of computer systems in our daily lives, a reliability model for a computer system of two identical units having h/w and s/w components is developed. Initially one unit is operative and other is kept as cold standby. The hardware and software components in the unit fail independently. There is a single server who visits the system immediately for carrying out preventive maintenance, repair and replacement of the components upon their failures. The unit undergoes for preventive maintenance after a maximum operation time at normal mode. The unit fails completely directly from normal mode. If repair of the component is not possible up to a pre-specific time (called Maximum Repair Time), the components are replaced by new one with some

Corresponding author: S. C. Malik^{*}

^{*}Department of Statistics, M.D. University, Rohtak-124001, Haryana, India

replacement time. However, only replacement of the software components by new one is made after failures. The random variables are independent and uncorrelated to each other. The switch devices, preventive maintenance and repair are perfect. The failure time of the unit due to failure of h/w and s/w components are exponentially, while the distributions of preventive maintenance, repair and replacement time taken as arbitrary with different probability density functions. The expressions for various reliability measures such as mean time to system failure, availability, busy period of the server due to preventive maintenance, busy period of the server due to repair, busy period of the server due to hardware replacement, busy period of the server due to software replacement, expected number of software replacements, expected number of hardware replacement and expected number of visits of the server are derived by using semi-Markov process and regenerative point technique. The graphical study of the results for a particular case has also been made.

2. NOTATIONS

E	:	The set of regenerative states
NO	:	The unit is operative and in normal mode
Cs	:	The unit is cold standby
a/b	:	Probability that the system has hardware / software failure
λ_1/λ_2	:	Constant hardware / software failure rate
α_0	:	Maximum Operation Time
β_0	:	Maximum Repair Time.
Pm/PM	:	The unit is under preventive Maintenance/ under preventive maintenance continuously from previous state
WPm/WPM	:	The unit is waiting for preventive Maintenance/ waiting for preventive maintenance from previous state
HFur/HFUR	:	The unit is failed due to hardware and is under repair / under repair continuously from previous state
HFurp/HFURP	:	The unit is failed due to hardware and is under replacement / under replacement continuously from previous state
HFwr / HFWR	:	The unit is failed due to hardware and is waiting for repair/waiting for repair continuously from previous state
SFurp/SFURP	:	The unit is failed due to the software and is under replacement/under replacement continuously from previous state
SFwrp/SFWRP	:	The unit is failed due to the software and is waiting for replacement / waiting for replacement continuously from previous state
h(t) / H(t)	:	pdf / cdf of replacement time of unit due to software
g(t) / G(t)	:	pdf / cdf of repair time of the hardware
m(t) / M(t)	:	pdf / cdf of replacement time of the hardware
f(t) / F(t)	:	pdf / cdf of the time for PM of the unit
$q_{ij}(t) / Q_{ij}(t)$:	pdf / cdf of passage time from regenerative state i to a regenerative state j or to a failed state j without visiting any other regenerative state in (0, t]
pdf / cdf	:	Probability density function/ Cumulative density function
$q_{ij,kr}(t) / Q_{ij,kr}(t)$:	pdf/cdf of direct transition time from regenerative state i to a regenerative state j or to a failed state j visiting state k, r once in (0, t]
$\mu_i(t)$:	Probability that the system up initially in state $S_i \in E$ is up at time t without visiting to any regenerative state
$W_i(t)$:	Probability that the server is busy in the state S_i upto time 't' without making any transition to any other regenerative state or returning to the same state via one or more non-regenerative states.
m_{ij}	:	Contribution to mean sojourn time (μ_i) in state S_i when system transit directly to state S_j so that $\mu_i = \sum_j m_{ij}$ and $m_{ij} = \int_0^\infty t dQ_{ij}(t) = -q_{ij}^*(0)$
⊗/⊙	:	Symbol for Laplace-Stieltjes convolution/Laplace convolution
~ / *	:	Symbol for Laplace Steiltjes Transform (LST) / Laplace Transform (LT)
' (desh)	:	Used to represent alternative result

The following are the possible transition states of the system:

3. TRANSITION PROBABILITIES AND MEAN SOJOURN TIMES

Simple probabilistic considerations yield the following expressions by taking $A = a\lambda_1 + b\lambda_2 + \alpha_0$, $B = a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0$ for the non-zero elements

$$p_{ij} = Q_{ij}(\infty) = \int_0^{\infty} q_{ij}(t) dt \quad \text{as} \quad (1)$$

$$\begin{aligned}
 p_{01} &= \frac{\alpha_0}{A}, p_{02} = \frac{a\lambda_1}{A}, p_{03} = \frac{b\lambda_2}{A}, p_{10} = f^*(A), p_{16} = \frac{a\lambda_1}{A} [1 - f^*(A)] = p_{12.6}, p_{18} = \frac{b\lambda_2}{A} [1 - f^*(A)] = p_{13.8}, \\
 p_{1.13} &= \frac{\alpha_0}{A} [1 - f^*(A)] = p_{11.13}, p_{20} = g^*(B), p_{24} = \frac{\beta_0}{B} [1 - g^*(B)], p_{25} = \frac{\alpha_0}{B} [1 - g^*(B)], p_{2.11} = \frac{b\lambda_2}{B} [1 - g^*(B)], \\
 p_{2.12} &= \frac{a\lambda_1}{B} [1 - g^*(B)], p_{30} = h^*(A), p_{37} = \frac{a\lambda_1}{A} [1 - h^*(A)] = p_{32.7}, p_{39} = \frac{\alpha_0}{A} [1 - h^*(A)] = p_{3.1.9}, p_{40} = m^*(A), \\
 p_{3.10} &= \frac{b\lambda_2}{A} [1 - h^*(A)] = p_{33.10}, p_{51} = g^*(\beta_0), p_{5.16} = 1 - g^*(\beta_0), p_{4.17} = \frac{\alpha_0}{A} [1 - m^*(A)] = p_{4.1.17}, p_{62} = f^*(0), \\
 p_{72} &= h^*(0), p_{83} = f^*(0), p_{91} = h^*(0), p_{10.3} = h^*(0), p_{11.3} = g^*(\beta_0), p_{11.14} = 1 - g^*(\beta_0), p_{4.18} = \frac{b\lambda_2}{A} [1 - m^*(A)] = p_{43.18}, \\
 p_{12.2} &= g^*(\beta_0), p_{12.15} = 1 - g^*(\beta_0), p_{13.1} = f^*(0), p_{14.3} = m^*(0), p_{4.19} = \frac{a\lambda_1}{A} [1 - m^*(A)] = p_{42.19}, p_{15.2} = m^*(0), \\
 p_{16.1} &= m^*(0), p_{17.1} = m^*(0), p_{18.3} = m^*(0), p_{19.2} = m^*(0), p_{21.5} = \frac{\alpha_0}{B} [1 - g^*(B)] g^*(\beta_0), \\
 p_{21.5.16} &= \frac{\alpha_0}{B} [1 - g^*(B)] [1 - g^*(\beta_0)], p_{23.11} = \frac{b\lambda_2}{B} [1 - g^*(B)] [g^*(\beta_0)], p_{23.11.14} = \frac{b\lambda_2}{B} [1 - g^*(B)] [1 - g^*(\beta_0)], \\
 p_{22.12} &= \frac{a\lambda_1}{B} [1 - g^*(B)] g^*(\beta_0), p_{22.12.15} = \frac{a\lambda_1}{B} [1 - g^*(B)] [1 - g^*(\beta_0)] \quad (2)
 \end{aligned}$$

It can be easily verified that

$$\begin{aligned}
 p_{01} + p_{02} + p_{03} &= p_{10} + p_{16} + p_{18} + p_{1.13} = p_{20} + p_{24} + p_{25} + p_{2.11} + p_{2.12} \\
 &= p_{30} + p_{37} + p_{39} + p_{3.10} = p_{40} + p_{4.17} + p_{4.18} + p_{4.19} = p_{5.1} + p_{5.16} = p_{62} = p_{72} = p_{83} = p_{91} = p_{10.3} \\
 &= p_{11.3} + p_{11.14} = p_{12.2} + p_{12.15} = p_{13.1} = p_{14.1} = p_{15.2} = p_{16.1} = p_{17.1} = p_{18.3} = p_{19.2} \\
 &= p_{10} + p_{12.6} + p_{11.13} + p_{13.8} = p_{20} + p_{24} + p_{25} + p_{21.5} + p_{21.5.16} + p_{23.11} + p_{23.11.14} + p_{22.12} + p_{22.12.15} \\
 &= p_{30} + p_{31.9} + p_{32.7} + p_{33.10} = p_{40} + p_{4.17} + p_{4.19} + p_{43.18} = 1 \quad (3)
 \end{aligned}$$

The mean sojourn times (μ_i) in the state S_i are

$$\begin{aligned}
 \mu_0 &= \frac{1}{a\lambda_1 + b\lambda_2 + \alpha_0}, \mu_1 = \frac{1}{a\lambda_1 + b\lambda_2 + \alpha_0 + \alpha}, \mu_2 = \frac{1}{a\lambda_1 + b\lambda_2 + \alpha_0 + \theta + \beta_0}, \\
 \mu_3 &= \frac{1}{a\lambda_1 + b\lambda_2 + \alpha_0 + \beta}, \mu_4 = \frac{1}{a\lambda_1 + b\lambda_2 + \alpha_0 + \gamma} \quad (4)
 \end{aligned}$$

Also

$$\begin{aligned}
 m_{01} + m_{02} + m_{03} &= \mu_0 & m_{10} + m_{16} + m_{18} + m_{1.13} &= \mu_1 \\
 m_{20} + m_{24} + m_{25} + m_{2.11} + m_{2.12} &= \mu_2 & m_{30} + m_{37} + m_{39} + m_{3.10} &= \mu_3 \\
 m_{40} + m_{4.17} + m_{4.18} + m_{4.19} &= \mu_4 & m_{51} + m_{5.16} &= \mu_5 \quad m_{11.14} + m_{11.3} = \mu_{11} \\
 m_{12.15} + m_{12.2} &= \mu_{12} \quad m_{62} = \mu_6 \quad m_{72} = \mu_7, & m_{83} = \mu_8, m_{91} = \mu_9, m_{10.3} &= \mu_{10}, \\
 m_{10} + m_{12.6} + m_{13.8} + m_{11.13} &= \mu'_1 \text{ (say)} \\
 m_{20} + m_{24} + m_{25} + m_{21.5} + m_{21.5.16} + m_{22.12} + m_{22.12.15} + m_{23.11} + m_{23.11.14} &= \mu'_2 \text{ (say)} \\
 m_{30} + m_{31.9} + m_{32.7} + m_{33.10} &= \mu'_3 \text{ (say)}, \quad m_{40} + m_{4.17} + m_{43.18} + m_{4.19} &= \mu'_4 \text{ (say)} \quad (5)
 \end{aligned}$$

4. RELIABILITY AND MEAN TIME TO SYSTEM FAILURE (MTSF)

Let $\phi_i(t)$ be the c.d.f of first passage time from the regenerative state i to a failed state. Regarding the failed state as absorbing state, we have the following recursive relation for $\phi_i(t)$:

$$\phi_i(t) = \sum_j Q_{i,j}(t) \otimes \phi_j(t) + \sum_k Q_{i,k}(t) \quad (6)$$

Where j is an un-failed regenerative state to which the given regenerative state i can transit and k is a failed state to which the state i can transit directly.

Taking LT of above relation (6) and solving for $\tilde{\phi}_0(s)$

We have

$$R^*(s) = \frac{1 - \tilde{\phi}_0(s)}{s} \quad (7)$$

The reliability of the system model can be obtained by taking Laplace inverse transform of (7). The mean time to system failure (MTSF) is given by

$$MTSF = \lim_{s \rightarrow 0} \frac{1 - \tilde{\phi}_0(s)}{s} = \frac{N_1}{D_1} \quad \text{where} \quad (8)$$

$$N_1 = \mu_0 + p_{01}\mu_1 + p_{02}\mu_2 + p_{03}\mu_3 + p_{24}p_{02}\mu_4 \quad \text{and} \quad D_1 = 1 - p_{01}p_{10} - p_{02}p_{20} - p_{03}p_{30} - p_{02}p_{24}p_{40}$$

5. STEADY STATE AVAILABILITY

Let $A_i(t)$ be the probability that the system is in up-state at instant 't' given that the system entered regenerative state i at $t = 0$. The recursive relations for $A_i(t)$ are given as

$$A_i(t) = M_i(t) + \sum_j q_{i,j}^{(n)}(t) \odot A_j(t) \quad (9)$$

Where j is any successive regenerative state to which the regenerative state i can transit through $n \geq 1$ (natural number) transitions. $M_i(t)$ is the probability that the system is up initially in state $S_i \in E$ is up at time t without visiting to any other regenerative state, we have

$$\begin{aligned} M_0(t) &= e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t}, M_1(t) = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \overline{F(t)}, M_2(t) = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0)t} \overline{G(t)} \\ M_3(t) &= e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \overline{H(t)}, M_4(t) = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \overline{M(t)} \end{aligned} \quad (10)$$

Taking LT of above relations (9) and solving for $A_0^*(s)$, the steady state availability is given by

$$A_0(\infty) = \lim_{s \rightarrow 0} sA_0^*(s) = \frac{N_2}{D_2}, \quad \text{where} \quad (11)$$

$$\begin{aligned} M_0(t) &= e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t}, M_1(t) = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \overline{F(t)}, M_2(t) = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0)t} \overline{G(t)} \\ M_3(t) &= e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \overline{H(t)}, M_4(t) = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \overline{M(t)} \end{aligned} \quad (11)$$

Taking LT of above relations (10) and solving for $A_0^*(s)$, the steady state availability is given by

$$A_0(\infty) = \lim_{s \rightarrow 0} sA_0^*(s) = \frac{N_2}{D_2}, \quad \text{where} \quad (12)$$

$$\begin{aligned} N_2 = & (1 - p_{22.12} - p_{22.12,15} - p_{24}p_{42.19}) [\mu_0 p_{10} (1 - p_{33.10}) + \mu_0 p_{13.8} p_{30} + \mu_1 (1 - p_{33.10}) - \mu_1 p_{03} p_{30} + \mu_3 p_{13.8} + \mu_3 p_{03} p_{10}] + (p_{23.11} + \\ & p_{23.11,14} + p_{24}p_{43.18}) [-\mu_0 p_{10} p_{32.7} - p_{32.7} \mu_0 - \mu_1 p_{02} p_{30} + p_{12.6} \mu_3 + p_{02} p_{10} \mu_3 + p_{12.6} \mu_0 p_{30}] + (p_{20} + p_{24} p_{40}) [\mu_0 p_{12.6} (1 - p_{33.10}) + \\ & \mu_0 p_{13.8} p_{32.7}] + (\mu_4 p_{24} + \mu_2) (p_{02}) [p_{10} (1 - p_{33.10}) + p_{13.8} p_{30}] + (p_{20} + p_{24} p_{40}) [-\mu_1 p_{02} (1 - p_{33.10}) - \mu_1 p_{03} p_{32.7}] - (\mu_4 p_{24} + \mu_2) (p_{03}) \\ & [p_{30} p_{12.6} - p_{32.7} p_{10}] + (p_{20} + p_{24} p_{40}) [-\mu_3 p_{02} p_{13.8} + \mu_3 p_{03} p_{12.6}] \end{aligned}$$

and

$$D_2 = (1-p_{22.12}-p_{22.12,15}-p_{24}p_{42.19})[\mu_0 (1 - p_{11.13}) (1 - p_{33.10}) - \mu_0 p_{13.8} p_{31.9} + p_{01} \mu'_1 (1 - p_{33.10}) + \mu'_3 p_{01} p_{13.8} + p_{03} \mu'_1 p_{31.9} + p_{03} \mu'_3 (1 - p_{33.10})] + (p_{23.11} + p_{23.11,14} + p_{24} p_{43.18}) [-\mu_0 (1 - p_{11.13}) p_{32.7} - p_{31.9} p_{12.6} \mu_0 - p_{01} \mu'_1 p_{32.7} + p_{01} \mu'_3 p_{12.6} + p_{02} \mu'_1 p_{31.9} + p_{02} \mu'_3 (1 - p_{11.13})] + (p_{21.5} + p_{21.5,16} + p_{24} p_{41.17}) [-\mu_0 p_{12.6} (1 - p_{33.10}) + \mu_0 p_{13.8} p_{32.7} + p_{02} \mu'_1 (1 - p_{33.10}) + p_{03} \mu'_1 p_{32.7} + p_{02} \mu'_3 p_{13.8} - p_{03} \mu'_3 p_{12.6}] + p_{01} (\mu'_2 + p_{24} \mu'_4) [p_{12.6} (1 - p_{33.10}) + p_{13.8} p_{32.7}] + p_{02} (\mu'_2 + p_{24} \mu'_4) [(1 - p_{11.13}) (1 - p_{33.10}) - p_{13.8} p_{31.9}] + p_{03} (\mu'_2 + p_{24} \mu'_4) [p_{32.7} (1 - p_{11.13}) + p_{12.6} p_{31.9}]$$

6. BUSY PERIOD ANALYSIS FOR SERVER

(a) Due to Preventive Maintenance (PM)

Let $B_i^P(t)$ be the probability that the server is busy in preventive maintenance of the unit at an instant 't' given that the system entered state i at t = 0. The recursive relations $B_i^P(t)$ for are as follows:

$$B_i^P(t) = W_i(t) + \sum_j q_{i,j}^{(n)}(t) \odot B_j^P(t) \quad (12)$$

Where j is any successive regenerative state to which the regenerative state i can transit through $n \geq 1$ (natural number) transitions. $W_1(t)$ be the probability that the server is busy in state S_i due to preventive maintenance up to time t without making any transition to any other regenerative state or returning to the same via one or more non-regenerative states and so

$$W_1 = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \bar{F}(t) + (\alpha_0 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \odot 1 \bar{F}(t) + (a\lambda_1 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \odot 1 \bar{F}(t) + (b\lambda_2 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \odot 1 \bar{F}(t)$$

(b) Due to Hardware Failure

Let $B_i^R(t)$ be the probability that the server is busy in repairing the unit due to hardware failure at an instant 't' given that the system entered state i at t = 0. The recursive relations $B_i^R(t)$ for are as follows:

$$B_i^R(t) = W_i(t) + \sum_j q_{i,j}^{(n)}(t) \odot B_j^R(t) \quad (13)$$

where j is any successive regenerative state to which the regenerative state i can transit through $n \geq 1$ (natural number) transitions. $W_2(t)$ be the probability that the server is busy in state S_i due to hardware failure up to time t without making any transition to any other regenerative state or returning to the same via one or more non-regenerative states and so

$$W_2 = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0)t} \bar{G}(t) + (\alpha_0 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0)t} \odot 1 \bar{G}(t) + (a\lambda_1 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0)t} \odot 1 \bar{G}(t) + (b\lambda_2 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0 + \beta_0)t} \odot 1 \bar{G}(t)$$

(c) Due to replacement of the software

Let $B_i^S(t)$ be the probability that the server is busy due to replacement of the software at an instant 't' given that the system entered the regenerative state i at t = 0. We have the following recursive relations for $B_i^S(t)$:

$$B_i^S(t) = W_i(t) + \sum_j q_{i,j}^{(n)}(t) \odot B_j^S(t) \quad (14)$$

Where j is any successive regenerative state to which the regenerative state i can transit through $n \geq 1$ (natural number) transitions. $W_3(t)$ be the probability that the server is busy in state S_i due to replacement of the software up to time t without making any transition to any other regenerative state or returning to the same via one or more non-regenerative states and so

$$W_3 = e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \bar{H}(t) + (\alpha_0 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \odot 1 \bar{H}(t) + (a\lambda_1 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \odot 1 \bar{H}(t) + (b\lambda_2 e^{-(a\lambda_1 + b\lambda_2 + \alpha_0)t} \odot 1 \bar{H}(t)$$

(d) Due to Hardware Replacement

Let $B_i^{HRp}(t)$ be the probability that the server is busy in replacement of the unit due to hardware failure at an instant 't' given that the system entered state i at t = 0. The recursive relations $B_i^{HRp}(t)$ for are as follows:

$$B_i^{HRp}(t) = W_i(t) + \sum_j q_{i,j}^{(n)}(t) \odot B_j^{HRp}(t) \quad (15)$$

Where j is any successive regenerative state to which the regenerative state i can transit through $n \geq 1$ (natural number) transitions. $W_4(t)$ be the probability that the server is busy in state S_i due to hardware failure up to time t without making any transition to any other regenerative state or returning to the same via one or more non-regenerative states and so

$$W_4 = e^{-(a\lambda_1 + b\lambda_2 + a_0)t} \bar{M}(t) + (\alpha_0 e^{-(a\lambda_1 + b\lambda_2 + a_0)t} \otimes 1 \bar{M}(t) + (a\lambda_1 e^{-(a\lambda_1 + b\lambda_2 + a_0)t} \otimes 1 \bar{M}(t) + (b\lambda_2 e^{-(a\lambda_1 + b\lambda_2 + a_0)t} \otimes 1 \bar{M}(t)$$

Taking LT of above relations (12) to (15). And, solving for $B_0^{*H}(s)$ and $B_0^{*S}(s)$, the time for which server is busy due to repair and replacements respectively is given by

$$B_0^H = \lim_{s \rightarrow 0} s B_0^{*H}(s) = \frac{N_3^H}{D_2}, B_0^S = \lim_{s \rightarrow 0} s B_0^{*S}(s) = \frac{N_3^S}{D_2}, B_0^R = \lim_{s \rightarrow 0} s B_0^{*R}(s) = \frac{N_3^R}{D_2}$$

and $B_0^{HRP} = \lim_{s \rightarrow 0} s B_0^{*HRP}(s) = \frac{N_3^{HRP}}{D_2}$ (16)

$$N_3^P = \mu_1 \{ (1 - p_{22.12} - p_{22.12,15} p_{20} - p_{42.19} p_{24}) [(1 - p_{33.10}) - p_{03} p_{30}] - (p_{23.11} + p_{23.11,14} + p_{43.18} p_{24}) [p_{32.7} - p_{02} p_{30}] - (p_{20} + p_{24} p_{40}) [(1 - p_{33.10}) p_{02} + (p_{03} p_{32.7})] \}$$

$$N_3^R = p_{01} (1 - p_{33.10}) p_{12.6} - p_{13.8} p_{32.7} + p_{02} (1 - p_{33.10}) (1 - p_{11.13}) - p_{13.8} p_{31.9} + p_{03} (1 - p_{33.10}) p_{32.7} - p_{12.6} p_{31.9}$$

$$N_3^S = \mu_3 \{ (1 - p_{22.12} - p_{22.12,15} - p_{42.19} p_{24}) [(1 - p_{11.13}) p_{03} - p_{13.8} p_{01}] + (p_{23.11} + p_{23.11,14} + p_{43.18} p_{24}) [(1 - p_{11.13}) p_{02} + p_{12.6} p_{01}] + (p_{02} p_{13.8} - p_{03} p_{12.6}) (p_{21.5} + p_{21.5,16} + p_{41.17} p_{24}) \}$$

$$N_3^{HRP} = \mu_4 p_{24} [p_{01} \{ (1 - p_{33.10}) p_{12.6} + p_{13.8} p_{32.7} \}] + p_{02} \{ (1 - p_{33.10}) (1 - p_{11.13}) - p_{13.8} p_{31.9} \} + p_{03} \{ (1 - p_{11.13}) p_{32.7} + p_{12.6} p_{31.9} \}$$

and D_2 is already mentioned.

7. EXPECTED NUMBER OF REPLACEMENTS OF THE UNITS

(a) Due to Hardware Failure

Let $R_i^H(t)$ be the expected number of replacements of the failed hardware components by the server in $(0, t]$ given that the system entered the regenerative state i at $t = 0$.

The recursive relations for $R_i^H(t)$ are given as

$$R_i^H(t) = \sum_j q_{i,j}^{(n)}(t) \otimes [\delta_j + R_j^H(t)] \quad (17)$$

Where j is any regenerative state to which the given regenerative state i transits and $\delta_j = 1$, if j is the regenerative state where the server does job afresh, otherwise $\delta_j = 0$.

(b) Due to Software Failure

Let $R_i^S(t)$ be the expected number of replacements of the failed software by the server in $(0, t]$

given that the system entered the regenerative state i at $t = 0$. The recursive relations for $R_i^S(t)$ are given as

$$R_i^S(t) = \sum_j q_{i,j}^{(n)}(t) \otimes [\delta_j + R_j^S(t)] \quad (18)$$

Where j is any regenerative state to which the given regenerative state i transits and $\delta_j = 1$, if j is the regenerative state where the server does job afresh, otherwise $\delta_j = 0$.

Taking LT of relations (17) and (18). And, solving for $\tilde{R}_0^H(s)$ and $\tilde{R}_0^S(s)$. The expected numbers of replacements per unit time to the hardware and software failures are respectively of given by

$$R_0^H(\infty) = \lim_{s \rightarrow 0} s \tilde{R}_0^H(s) = \frac{N_4^H}{D_2} \text{ and } R_0^S(\infty) = \lim_{s \rightarrow 0} s \tilde{R}_0^S(s) = \frac{N_4^S}{D_2} \quad (19)$$

Where D_2 is already mentioned.

$$N_4^H = (p_{23.11,14} + p_{21.5,16} + p_{22.12,15} + p_{24})\{p_{01}[(1 - p_{33.10})p_{12.6} + p_{13.8}p_{32.7}] + p_{02} [(1 - p_{11.13})(1 - p_{33.10}) - p_{31.9}p_{13.8}] + p_{03}[(1 - p_{11.13})p_{32.7} + p_{31.9}p_{12.6}]\}$$

$$N_4^S = \{(1 - p_{22.12} - p_{22.12,15} - p_{42.19}p_{24})[(1 - p_{11.13})p_{03} + p_{13.8}p_{01}] + (p_{23.11} + p_{23.11,14} + p_{43.18}p_{24}) [(1 - p_{11.13})p_{02} + p_{12.6}p_{01}] + (p_{02}p_{13.8} - p_{03}p_{12.6})(p_{21.5} + p_{21.5,16} + p_{41.17}p_{24})\}$$

8. EXPECTED NUMBER OF VISITS BY THE SERVER

Let $N_i(t)$ be the expected number of visits by the server in $(0, t]$ given that the system entered the regenerative state i at $t = 0$. The recursive relations for $N_i(t)$ are given as

$$N_i(t) = \sum_j q_{i,j}^{(n)}(t) \otimes [\delta_j + N_j(t)] \quad (20)$$

Where j is any regenerative state to which the given regenerative state i transits and $\delta_j = 1$, if j is the regenerative state where the server does job afresh, otherwise $\delta_j = 0$. Taking LT of relation (20) and solving for $\tilde{N}_0(s)$. The expected

$$\text{number of visit per unit time by the server are given by } N_0(\infty) = \lim_{s \rightarrow 0} s \tilde{N}_0(s) = \frac{N_5}{D_2}, \quad (21)$$

where

$$N_5 = (1 - p_{22.12} - p_{22.12,15} - p_{42.19}p_{24})[(1 - p_{11.13})(1 - p_{33.10}) - p_{13.8}p_{31.9}] - (p_{23.11} + p_{23.11,14} + p_{43.18}p_{24}) [(1 - p_{11.13})p_{32.7} + p_{31.9}p_{12.6}] - (p_{21.5} + p_{21.5,16} + p_{41.17}p_{24})[p_{12.6}(1 - p_{33.10}) + p_{13.8}p_{32.7}]$$

9. ECONOMIC ANALYSIS

The profit incurred to the system model in steady state can be obtained as

$$P = K_0 A_0 - K_1 B_0^p - K_2 B_0^R - K_3 B_0^S - K_4 B_0^{HRp} - K_5 R_0^H - K_6 R_0^S - K_7 N_0 \quad (22)$$

K_0 = Revenue per unit up-time of the system

K_1 = Cost per unit time for which server is busy due preventive maintenance

K_2 = Cost per unit time for which server is busy due to hardware failure

K_3 = Cost per unit replacement of the failed software component

K_4 = Cost per unit replacement of the failed hardware component

K_5 = Cost per unit replacement of the failed hardware

K_6 = Cost per unit replacement of the failed software

K_7 = Cost per unit visit by the server

CONCLUSION

In the present study, considering a particular case by taking $g(t) = \theta e^{-\theta t}$, $h(t) = \beta e^{-\beta t}$, $f(t) = \alpha e^{-\alpha t}$ and $m(t) = \gamma e^{-\gamma t}$ the numerical results are obtained for some reliability and economic measures of a computer system of two identical units having h/w and s/w components. The graphs for mean time to system failure (MTSF), availability and profit are drawn with respect to preventive maintenance (α) rate for fixed values of parameters as shown respectively in fig. 3 and 4. Through these figures, it is revealed that MTSF, Availability and profit increases with the increase of PM rate (α) and repair rate (θ) of the hardware components. But the value of these measures decreases with the increase of maximum operation time (α_0). Again if we increase the value of maximum repair time (β_0), the value of availability and profit are decreases while MTSF increases. Thus finally it is concluded that a system in which chances of h/w failure are high can be made reliable and economical

- (i) To use reducing the repair time of the h/w components as well as conducting PM of the units after a pre-specific period of time.
- (ii) Making replacement of the hardware by new one in case repair time is too long.
- (iii) Making replacement of s/w components by new one.

ACKNOWLEDGEMENT

The authors are grateful to the Department of Science & Technology (DST), Govt. of India for providing financial helps under INSPIRE Fellowship Scheme to carry out this research work.

REFERENCES


[1] Friedman, M. A. and Tran, P.(1992): Reliability Techniques for Combined Hardware/Software Systems, Proc. Of Annual Reliability and Maintability Symposium, pp.290-293.

[2] Welke, S. R.; Labib, S. W. and Ahmed, A. M.(1995):Reliability Modeling of Hardware/ Software System, IEEE Transactions on Reliability, Vol.44, No.3, pp.413-418.




[3] Malik, S. C. and Jyoti Anand(2010): Reliability and Economic Analysis of a Computer System with Independent Hardware and Software Failures, Bulletin of Pure and Applied Sciences, Vol.29 E (Math. & Stat.), No. 1, pp.141-153.

[4] Singh, S. K. and Agrafiotis, G. K.(1995): Stochastic Analysis of a Two- Unit Cold Standby System Subject to Maximum Operation and Repair Time, Microelectron.Reliab., Vol.35,No.12,pp.1489-1493.

[5] Malik, S. C. and Nandal, P.(2010): Cost- Analysis of Stochastic Models with Priority to Repair Over Preventive Maintenance Subject to Maximum Operation Time, Edited Book, Learning Manual on Modeling, Optimization and Their Applications, Excel India Publishers, pp.165-178.

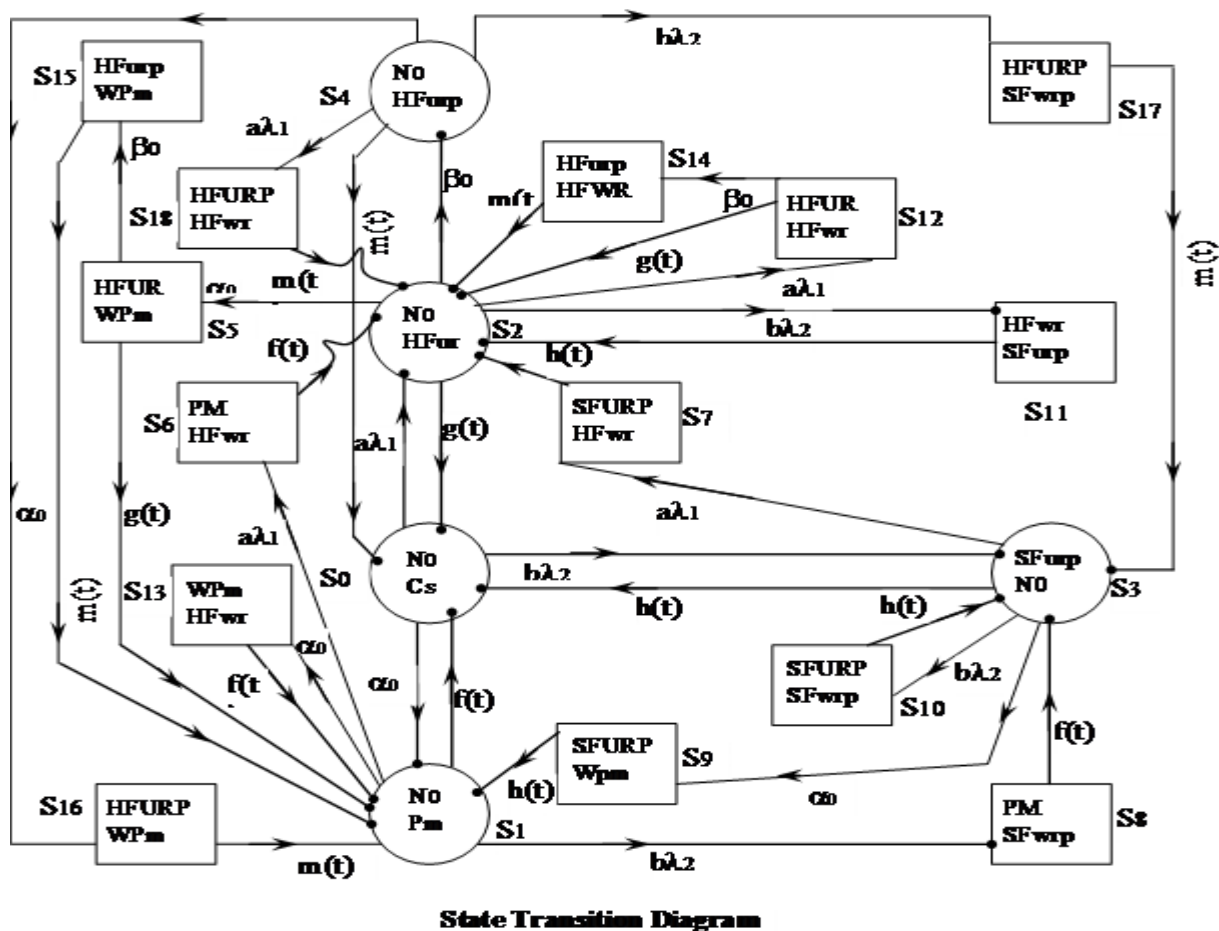

○ ⇒ Operative State
 □ ⇒ Failed State
 • ⇒ Regenerative Point

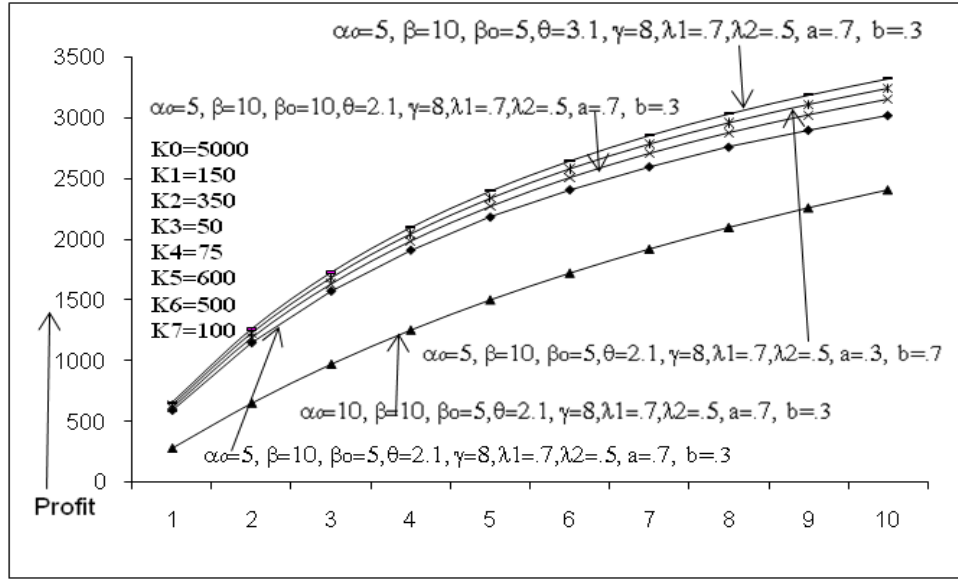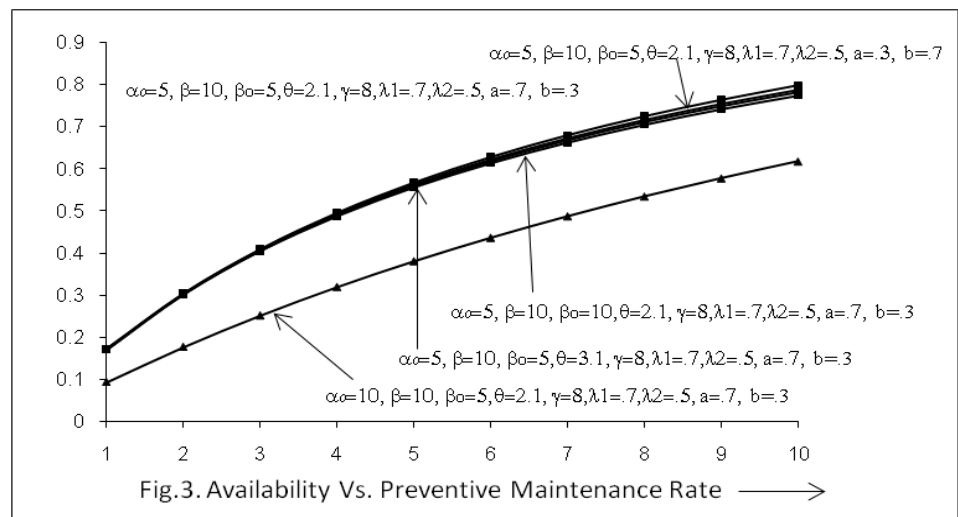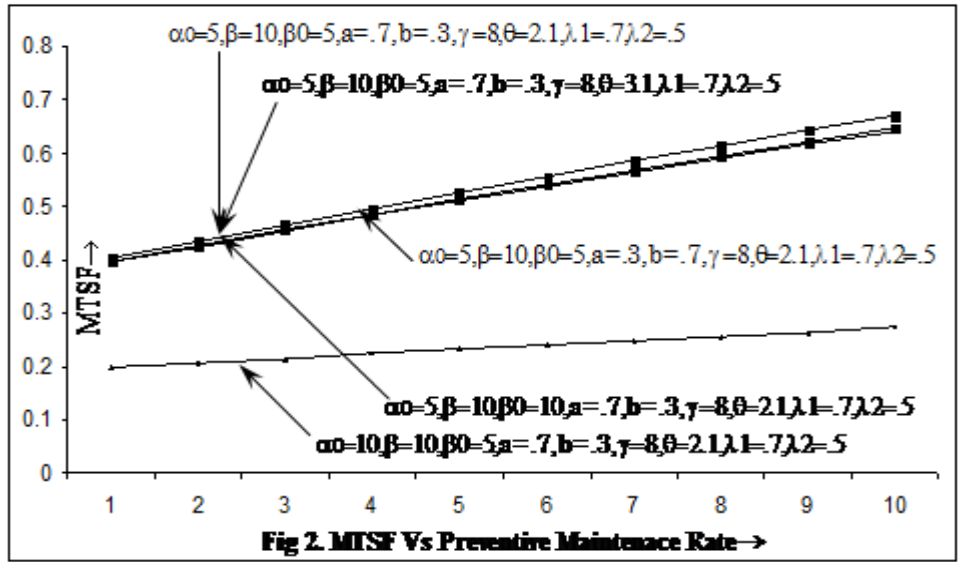

Source of support: Department of Science & Technology (DST), Govt. of India,
Conflict of interest: None Declared