

**RADIATION EFFECTS ON THE PERISTALTIC FLOW
OF A JEFFREY FLUID THROUGH A POROUS MEDIUM IN A CHANNEL**

B. RANJITHA¹ AND M. V. SUBBA REDDY*²

¹Research Scholar, Department of Mathematics,
Rayalaseema University, Kurnool-518002, Andhra Pradesh, India.

²Professor, Department of CSE,
Sri Venkatesa Perumal College of Engineering & Technology,
Puttur-517583, Andhra Pradesh, India.

(Received On: 07-08-18; Revised & Accepted On: 99-09-18)

ABSTRACT

In this paper, the flow of a Jeffrey fluid through a porous medium in a channel with peristalsis has received minute attention. Hence, an attempt is made to study the peristaltic flow of a Jeffrey fluid through a porous medium in a symmetric channel under the assumptions of long wavelength. The expressions for the velocity and pressure gradient are obtained analytically. The effects of various pertinent parameters on the pumping characteristics and temperature field are studied in detail with the aid of graphs.

Keywords: Jeffrey fluid; Porous medium; Peristaltic flow; Radiation.

1. INTRODUCTION

The study of the mechanism of peristalsis in both mechanical and physiological situations has recently become the object of scientific research, since the first investigation of Latham [7]. Several theoretical and experimental attempts have been made to understand peristaltic action in different situations. A review of much of the early literature is presented in an article by Jaffrin and Shapiro [5]. A summary of most of the experimental and theoretical investigations reported with details of the geometry, fluid Reynolds number, wavelength parameter wave amplitude parameter and wave shape has been given by Srivastava and Srivastava [14].

Flow through a porous medium has been of considerable interest in recent years particularly among geophysical fluid dynamicists. Examples of natural porous media are beach sand, sand stone, limestone, rye bread, wood, the human lung, bile duct, gall bladder with stones and in small blood vessels. Flow through a porous medium has been studied by a number of workers employing Darcy's law Scheidegger [13]. Some studies about this point have been made by Varshney [17] and Raptis and Perdikis [11]. The first study of peristaltic flow through a porous medium is presented by Elsehawey *et al.* [2]. Elsehawey *et al.* [3] studied peristaltic motion of a generalized Newtonian fluid through a porous medium. Non-linear peristaltic transport through a porous medium in an inclined planar channel has studied by Mekheimer [9] taking the gravity effect on pumping characteristics. Subba Reddy and Nadhamuni Reddy [15] have studied the peristaltic flow of a non-Newtonian fluid through a porous medium in a tube with variable viscosity using Adomian decomposition method.

Heat transfer analysis can be used to obtain information about the properties of tissues. For example, the flow of blood can be evaluated using a dilution technique. In this procedure, heat is either injected or generated locally and the thermal clearance is monitored. With knowledge of initial thermal conditions and the thermal clearance rate, it is possible to estimate blood flow rates. A review of thermal dilution techniques can be found elsewhere Bowman [1]. Understanding of bio-heat transport is important in the beneficial applications of heat and cold for medical treatment. Recent advances in the application of heat (hyperthermia), radiation (laser therapy), and coldness (cryosurgery), as means to destroy undesirable tissues, such as cancer, have stimulated much interest in the study of thermal modeling in tissue. In the case of hyperthermia, it is noted that tissue can be destroyed when heated to 42 – 45° C (Field and Franconi [4]). Vajravelu *et al.* [16] have studied the peristaltic flow of a Newtonian fluid in a vertical porous annulus

**Corresponding Author: M. V. Subba Reddy*², ²Professor, Department of CSE,
Sri Venkatesa Perumal College of Engineering & Technology,
Puttur-517583, Andhra Pradesh, India.**

with heat transfer. The effect of heat transfer on the peristaltic flow of a Newtonian fluid in a vertical annulus under the effect of magnetic field was analyzed by Mekheimer and Elmaboud [10]. The influence of wall properties in the MHD peristaltic transport of a Newtonian fluid through a porous medium with heat transfer was studied by Kothandapani and Srinivas [6]. Influence of magnetic field and heat transfer on peristaltic flow of Jeffrey fluid through a porous medium in an asymmetric channel was studied by Vasudev *et al.* [18]. Mahmoud *et al.* [8] have investigated the effect of a heat transfer on the peristaltic transport of a Jeffrey fluid through a porous medium with magnetic field. Ravindranath Reddy *et al.* [12] have investigated influence of heat transfer on peristaltic flow of Jeffrey fluid through a porous medium in an inclined asymmetric channel.

However, the flow of a Jeffrey fluid through a porous medium in a channel with peristalsis has received minute attention. Hence, an attempt is made to study the peristaltic flow of a Jeffrey fluid through a porous medium in a symmetric channel under the assumptions of long wavelength. The expressions for the velocity and pressure gradient are obtained analytically. The effects of various pertinent parameters on the pumping characteristics and temperature field are studied in detail with the support of graphs.

2. MATHEMATICAL FORMULATION

We Consider an incompressible Jeffrey fluid confined in a two-dimensional infinite symmetric channel through porous medium. We employ a rectangular coordinate system with parallel and normal to the channel walls. The symmetry in the channel is induced by assuming the peristaltic wave train on the walls to have different amplitudes and phases due to the variation of channel.

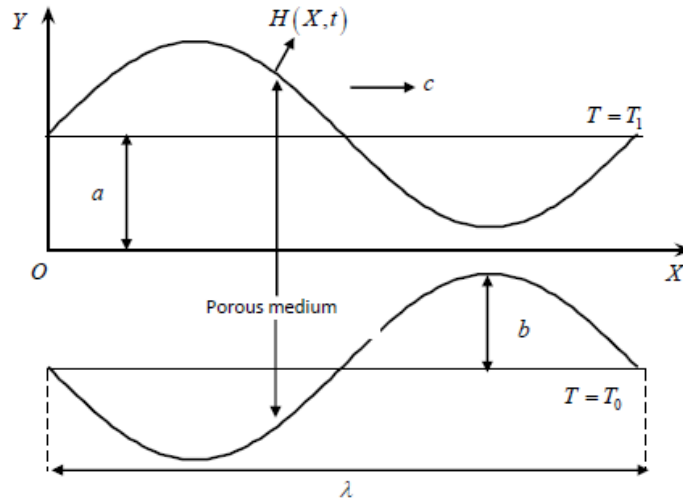


Fig. 1: The Physical Model

The shape of the symmetric channel wall is:

$$H(X, t) = a + b \cos \frac{2\pi}{\lambda} (X - ct) \quad (2.1)$$

Here a and b are the amplitudes of the waves, λ is the wavelength.

The constitutive equations for an incompressible Jeffrey fluid are:

$$I_0 = -pI + S \quad (2.2)$$

$$S = \frac{\mu}{1+\lambda_1} (\dot{\gamma} + \lambda_2 \ddot{\gamma}) \quad (2.3)$$

where I and S Cauchy stress tensor and extra stress tensor, respectively, p is the pressure, I is the identity tensor, μ is dynamic viscosity, λ_1 is the ratio of relaxation to retardation times λ_2 is the retardation time, $\dot{\gamma}$ is the shear rate and dots over the quantities indicate differentiation with respect to time.

In laboratory frame, the equations governing two-dimensional motion of an incompressible MHD Jeffrey fluid through a porous medium:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (2.4)$$

$$\rho \left(\frac{\partial u}{\partial t} + U \frac{\partial u}{\partial x} + V \frac{\partial u}{\partial y} \right) = -\frac{\partial p}{\partial x} + \frac{\partial}{\partial x} (S_{xx}) + \frac{\partial}{\partial y} (S_{xy}) - \sigma H_0^2 U - \frac{\mu}{k_0} U \quad (2.5)$$

$$\rho \left(\frac{\partial v}{\partial t} + U \frac{\partial v}{\partial x} + V \frac{\partial v}{\partial y} \right) = -\frac{\partial p}{\partial y} + \frac{\partial}{\partial x} (S_{xy}) + \frac{\partial}{\partial y} (S_{yy}) - \frac{\mu}{k_0} V \quad (2.6)$$

$$\zeta \left(u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = \frac{k}{\rho} \nabla^2 T + \nu \left(2 \left[\left(\frac{\partial u}{\partial x} \right)^2 + \left(\frac{\partial v}{\partial y} \right)^2 \right] + \left(\frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right)^2 \right) + 4 \frac{\alpha^2}{\rho c_p} (T - T_0) \quad (2.7)$$

where U, V the velocity components in the laboratory frame are (X, Y) ρ is the density, p is the pressure and σ is the electrical conductivity of the fluid, ζ is a specific heat at constant volume, T is the temperature of the fluid, k is the thermal conductivity of the fluid, μ is the kinematic viscosity, k_0 is the permeability of the porous medium, α is the coefficient of linear thermal expansion of the fluid and

$$S_{XX} = \frac{2\mu}{1+\lambda_1} \left(1 + \lambda_2 \left[U \frac{\partial}{\partial X} + V \frac{\partial}{\partial Y} \right] \right) \frac{\partial U}{\partial X} \quad (2.8)$$

$$S_{YY} = \frac{2\mu}{1+\lambda_1} \left(1 + \lambda_2 \left[U \frac{\partial}{\partial X} + V \frac{\partial}{\partial Y} \right] \right) \frac{\partial V}{\partial Y} \quad (2.9)$$

$$S_{XY} = \frac{\mu}{1+\lambda_1} \left(1 + \lambda_2 \left[U \frac{\partial}{\partial X} + V \frac{\partial}{\partial Y} \right] \right) \left(\frac{\partial U}{\partial Y} - \frac{\partial V}{\partial X} \right) \quad (2.10)$$

We shall carry out this investigation in a coordinate system moving with the wave speed, in which the boundary shape is stationary. The coordinates and velocities in the laboratory frame (X, Y) , and the wave frame (x, y) , are related by:

$$x = X - ct, y = Y, u = U - c, v = V, p(x) = P(x, t),$$

where u, v the velocity components in the laboratory frame are (X, Y) , p is the pressure and P fixed frame references.

Introducing the non-dimensional parameters and variables

$$\bar{x} = \frac{x}{\lambda}, \bar{y} = \frac{y}{a_1}, \bar{u} = \frac{u}{c}, \bar{v} = \frac{v}{c\delta}, \bar{S} = \frac{a_1}{\mu c} S, \bar{p} = \frac{pa_1^2}{\mu c \lambda}, \bar{t} = \frac{ct}{\lambda}, h = \frac{H}{a},$$

$$\delta = \frac{a}{\lambda}, Re = \frac{\rho a c}{\mu}, \phi = \frac{b}{a}, \theta = \frac{T-T_0}{T_1-T_0}, Pr = \frac{\rho v \zeta}{k}, Ec = \frac{c^2}{\zeta(T_1-T_0)}$$

Using non-dimensional variables and parameters in Eqs. (2.4) - (2.6) we get

$$\delta \frac{\partial u}{\partial x} + \delta \frac{\partial v}{\partial y} = 0 \quad (2.11)$$

$$Re \delta \left(u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = -\frac{\partial p}{\partial x} + \delta \frac{\partial S_{xx}}{\partial x} + \frac{\partial S_{xy}}{\partial y} - \frac{1}{Da} u - \frac{1}{k} u \quad (2.12)$$

$$Re \delta^3 \left(u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} \right) = -\frac{\partial p}{\partial y} + \delta^2 \frac{\partial S_{xy}}{\partial x} + \frac{\partial S_{yy}}{\partial y} - \frac{\delta^2}{k} v \quad (2.13)$$

$$Re \delta \left[u \frac{\partial \theta}{\partial x} + v \frac{\partial \theta}{\partial y} \right] = \frac{1}{Pr} \left(\delta^2 \frac{\partial^2 \theta}{\partial x^2} + \frac{\partial^2 \theta}{\partial y^2} \right) + Ec \left[4\delta^2 \left(\frac{\partial u}{\partial x} \right)^2 + \left(\frac{\partial u}{\partial y} \right)^2 \right] + R^2 \theta \quad (2.14)$$

where $R^2 = \frac{4a^2 d^2}{k}$ is the radiation parameter, $Da = \frac{k}{a^2}$ is the Darcy number, $Pr = \frac{\rho v \zeta}{k}$ is the Prandtl number, $Ec = \frac{c^2}{\zeta(T_1-T_0)}$ is the Eckert number,

$$S_{xx} = \frac{2\delta}{1+\lambda_1} \left(1 + \frac{\delta c \lambda_2}{d_1} \left[u \frac{\partial}{\partial x} + v \frac{\partial}{\partial y} \right] \right) \frac{\partial u}{\partial x}$$

$$S_{xy} = \frac{1}{1+\lambda_1} \left(1 + \frac{\delta c \lambda_2}{d_1} \left[\frac{\partial u}{\partial y} \frac{\partial}{\partial x} - \frac{\partial}{\partial y} \frac{\partial u}{\partial x} \right] \right) \left(\frac{\partial u}{\partial y} + \delta^2 \frac{\partial v}{\partial x} \right)$$

$$S_{yy} = \frac{2\delta}{1+\lambda_1} \left(1 + \frac{\delta c \lambda_1}{d_1} \left[\frac{\partial u}{\partial y} \frac{\partial}{\partial x} - \frac{\partial u}{\partial x} \frac{\partial}{\partial y} \right] \right) \frac{\partial^2 u}{\partial x y}$$

Under lubrication approach (i.e., $\delta \ll 1$ and $Re \rightarrow 0$), the Equations (2.12) - (2.14) become:

$$0 = -\frac{\partial p}{\partial x} + \frac{1}{1+\lambda_1} \frac{\partial^2 u}{\partial y^2} - \frac{1}{Da} (u + 1) \quad (2.15)$$

$$0 = -\frac{\partial p}{\partial y} \quad (2.16)$$

$$\frac{d^2 \theta}{dy^2} + R^2 Pr \theta = -Pr Ec \left(\frac{\partial u}{\partial y} \right)^2 \quad (2.17)$$

The corresponding boundary conditions are

$$u = -1 \quad \text{at} \quad y = h \quad (2.18)$$

$$\frac{\partial u}{\partial y} = 0 \quad \text{at} \quad y = 0 \quad (2.19)$$

$$\frac{\partial \theta}{\partial y} = 0 \quad \text{at} \quad y = 0 \quad (2.20)$$

$$\theta = 1 \quad \text{at} \quad y = h \quad (2.21)$$

From Eq. (2.15) and (2.16), we write Eq. (2.15) as

$$0 = -\frac{dp}{dx} + \frac{1}{1+\lambda_1} \frac{\partial^2 u}{\partial y^2} - \frac{1}{Da} (u + 1) \quad (2.22)$$

The volume flux q through each cross section in the wave frame is given by

$$q = \int_0^h u dy \quad (2.23)$$

The instantaneous volume flow rate $Q(X, t)$ in the laboratory frame between the centre line and the wall is

$$Q(X, t) = \int_0^h U dY = \int_0^h (u + 1) dy = q + h \tag{2.24}$$

The average volume flow rate \bar{Q} over one wave period ($T = \frac{\lambda}{c}$) of the peristaltic wave is defined as

$$\bar{Q} = \frac{1}{T} \int_0^T Q(X, t) dt = q + 1 \tag{2.25}$$

3. SOLUTION

Solving Eq. (2.22) subject to the boundary conditions (2.18) and (2.19), we get

$$u = \left(\frac{1+\lambda_1}{N^2} \right) \frac{\partial p}{\partial x} \left[\frac{\cosh Ny}{\cosh Nh} - 1 \right] - 1 \tag{3.1}$$

where $N = \sqrt{\frac{1+\lambda_1}{Da}}$.

Using the Eq. (3.1) and solving the Eq. (2.17) subject to the boundary conditions (2.20) and (2.21), we get

$$\theta = \left[1 + PrE \left(\frac{1+\lambda}{N} \right)^2 \left(\frac{\partial p}{\partial x} \right)^2 \frac{1}{2 \cosh^2 Nh} \left[\frac{\cosh 2Nh}{4N^2 + \alpha_1^2} + \frac{1}{\alpha_1^2} \right] \frac{\cos \alpha_1 y}{\cos \alpha_1 h} \right] - PrE \left(\frac{1+\lambda}{N} \right)^2 \left(\frac{1}{4N^2 + \alpha_1^2} \right) \left(\frac{\partial p}{\partial x} \right)^2 \frac{\cosh 2Ny}{2 \cosh^2 Nh} + PrE \left(\frac{1+\lambda}{N} \right)^2 \left(\frac{\partial p}{\partial x} \right)^2 \frac{1}{\alpha_1^2 2 \cosh^2 Nh} \tag{3.2}$$

where $\alpha_1 = iR\sqrt{Pr}$.

The volume flux q through each cross section in the wave frame is given by

$$q = \int_0^h u dy = \left(\frac{1+\lambda}{N^3} \right) \frac{\partial p}{\partial x} [\tanh Nh - Nh] - h \tag{3.3}$$

From Eq. (3.3), we have

$$\frac{dp}{dx} = \frac{(q+h)N^3}{(1+\lambda_1)[\tanh Nh - Nh]} \tag{3.4}$$

The heat transfer coefficient at the upper wall is defined by

$$z = \left. \frac{\partial \theta}{\partial y} \cdot \frac{\partial h}{\partial x} \right|_{y=h} = -\alpha_1 \tanh \alpha_1 h - PrE \frac{(q+h)^2 N^4}{(\tanh Nh - Nh)^2 2 \cosh^2 Nh} \left[\alpha_1 \tanh \alpha_1 h \left(\frac{\cosh 2Nh}{4N^2 + \alpha_1^2} + \frac{1}{\alpha_1^2} \right) + \frac{4 \sinh 2Nh}{4N^2 + \alpha_1^2} \right] \tag{3.5}$$

4. DISCUSSIONS OF THE RESULT

Fig. 2 depicts the variation of axial pressure gradient $\frac{dp}{dx}$ with λ_1 for $\phi = 0.5$ and $Da = 0.1$. It is found that, the axial pressure gradient decreases on increasing the material parameter λ_1 .

Fig. 3 shows the variation of axial pressure gradient $\frac{dp}{dx}$ with Da for $\phi = 0.5$ and $\lambda_1 = 0.3$. It is noticed that, the axial pressure gradient decreases with increasing Darcy number Da .

Fig. 4 illustrates the variation of axial pressure gradient $\frac{dp}{dx}$ with ϕ for $\lambda_1 = 0.3$ and $Da = 0.1$. It is noticed that, the axial pressure gradient increases with an increase in amplitude ratio ϕ .

Fig. 5 depicts the variation of pressure rise Δp with \bar{Q} for different values of λ_1 with $\phi = 0.5$ and $Da = 0.1$. It is found that, the time-averaged flow rate \bar{Q} decreases in both the pumping ($\Delta p > 0$) and the free-pumping ($\Delta p = 0$) regions with increasing λ_1 , while it increases in the co-pumping ($\Delta p < 0$) region with increasing λ_1 .

Fig. 6 illustrates the variation of pressure rise Δp with \bar{Q} for different values of Da with $\phi = 0.5$ and $\lambda_1 = 0.3$. It is observed that, the time-averaged flow rate \bar{Q} decreases in the pumping region with increasing Da , while it increases in both the free-pumping and the co-pumping regions with increasing Da .

Fig. 7 shows the variation of pressure rise Δp with \bar{Q} for different values of ϕ with $\lambda_1 = 0.3$ and $Da = 0.1$. It is noted that, the time-averaged flow rate \bar{Q} increases in both the pumping and the free-pumping regions with increasing ϕ , while it decreases in the co-pumping region with increasing ϕ for chosen $\Delta p (< 0)$.

Fig. 8 depicts the temperature profiles for different values of λ_1 with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, Pr = 0.7, Ec = 0.1, R = 1$ and $x = 0.1$. It is found that, the temperature θ decreases with increasing material parameter λ_1 .

Fig. 9 shows the temperature profiles for different values of Da with $\phi = 0.5, \lambda_1 = 0.3, \bar{Q} = -1, Pr = 0.7, Ec = 0.1, R = 1$ and $x = 0.1$. It is found that, the temperature θ increases with increasing Darcy number Da .

Fig. 10 shows the temperature profiles for different values of ϕ with $\lambda_1 = 0.3, Da = 0.1, \bar{Q} = -1, Pr = 0.7, Ec = 0.1, R = 1$ and $x = 0.1$. It is found that, the temperature θ decreases with increasing amplitude ratio ϕ .

Fig. 11 depicts the temperature profiles for different values of Pr with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, \lambda_1 = 0.3, Ec = 0.1, R = 1$ and $x = 0.1$. It is found that, the temperature θ increases with increasing Prandtl number Pr .

Fig. 12 illustrates the temperature profiles for different values of Ec with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, \lambda_1 = 0.3, Pr = 0.7, R = 1$ and $x = 0.1$. It is found that, the temperature θ increases with increasing Eckert number Ec .

Fig. 13 shows the temperature profiles for different values of R with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, \lambda_1 = 0.3, Ec = 0.1, Pr = 0.7$ and $x = 0.1$. It is found that, the temperature θ decreases with increasing α_1 .

Table-1 shows the heat transfer coefficient Z at the upper wall $y = h$ for $x = 0.1$ and $\bar{Q} = -1$. It is observed that the heat transfer coefficient Z increases with increasing λ_1, Pr, ϕ and R , while it decreases with increasing Da and Ec .

5. CONCLUSIONS

In this paper, we studied the radiation effects on the peristaltic flow of a Jeffrey fluid through a porous medium in a channel under the assumptions of low Reynolds number and long wavelength approximations. A closed form solutions are obtained for the velocity, temperature and the pressure gradient. It is found that, the axial pressure gradient and the time averaged volume flow rate decreases with increasing λ_1 and Da , while they increases with increasing ϕ . The temperature increases with increasing the parameters Da, Pr and Ec , while it decreases with increasing the parameters λ_1, ϕ and R .

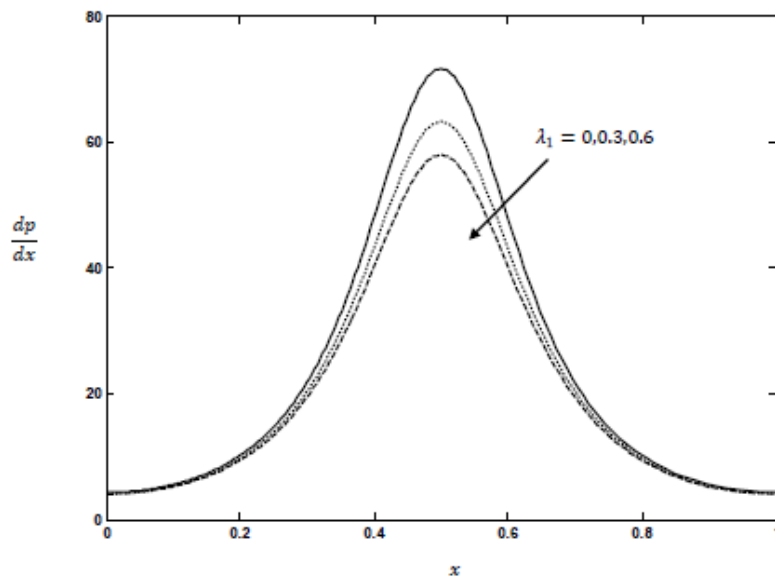


Fig. 2: The variation of axial pressure gradient $\frac{dp}{dx}$ with λ_1 for $\phi = 0.5$ and $Da = 0.1$.

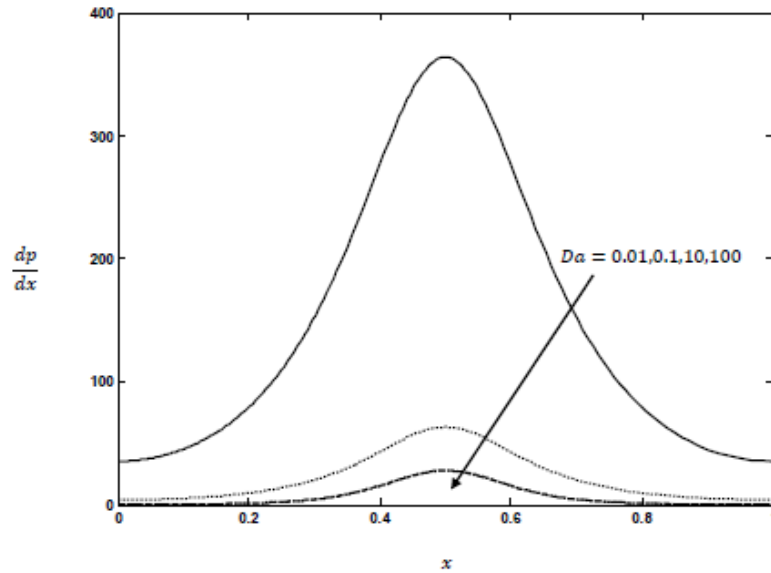


Fig. 3: The variation of axial pressure gradient $\frac{dp}{dx}$ with Da for $\phi = 0.5$ and $\lambda_1 = 0.3$.

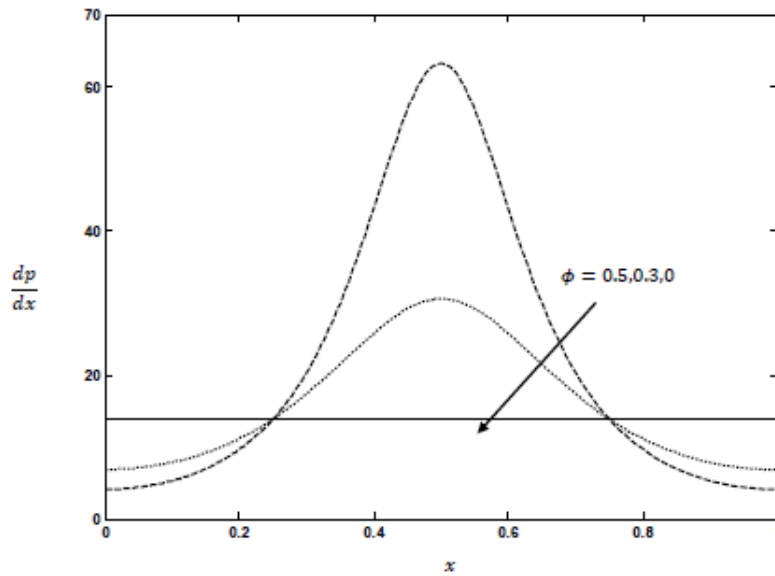


Fig. 4: The variation of axial pressure gradient $\frac{dp}{dx}$ with ϕ for $\lambda_1 = 0.3$ and $Da = 0.1$.

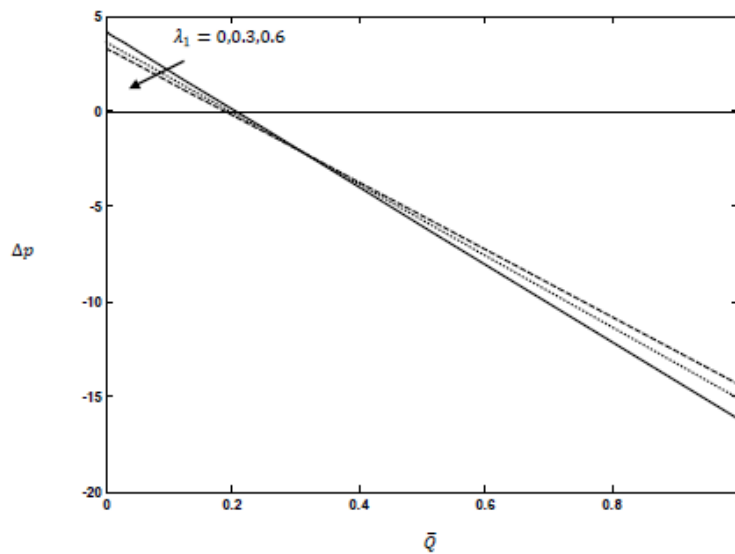


Fig. 5: The variation of pressure rise Δp with \bar{Q} for different values of λ_1 with $\phi = 0.5$ and $Da = 0.1$.

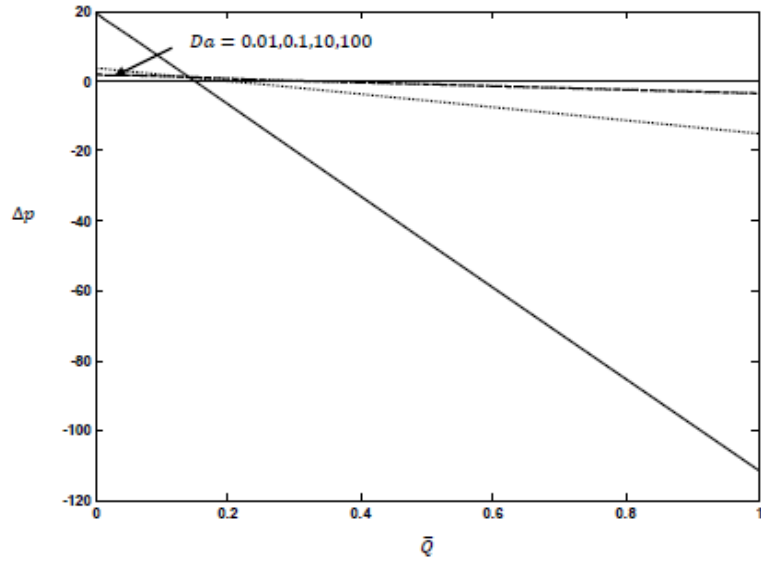


Fig. 6: The variation of pressure rise Δp with \bar{Q} for different values of Da with $\phi = 0.5$ and $\lambda_1 = 0.3$.

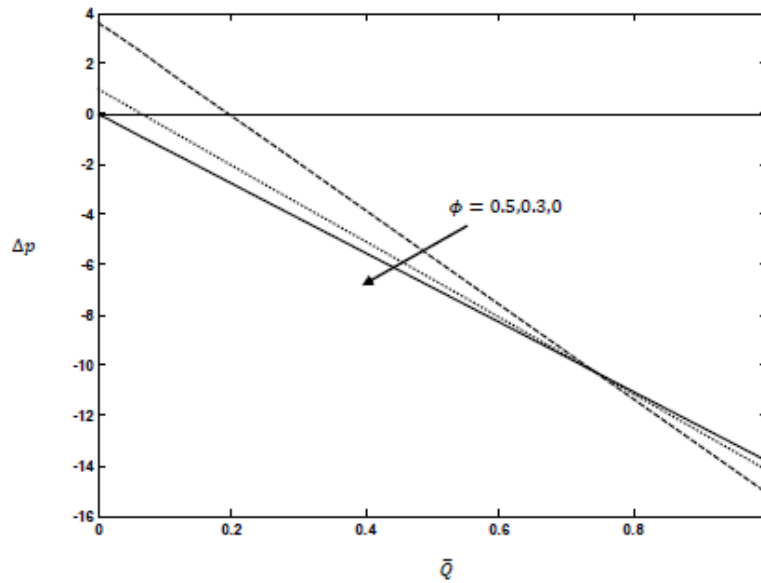


Fig. 7: The variation of pressure rise Δp with \bar{Q} for different values of ϕ with $\lambda_1 = 0.3$ and $Da = 0.1$.

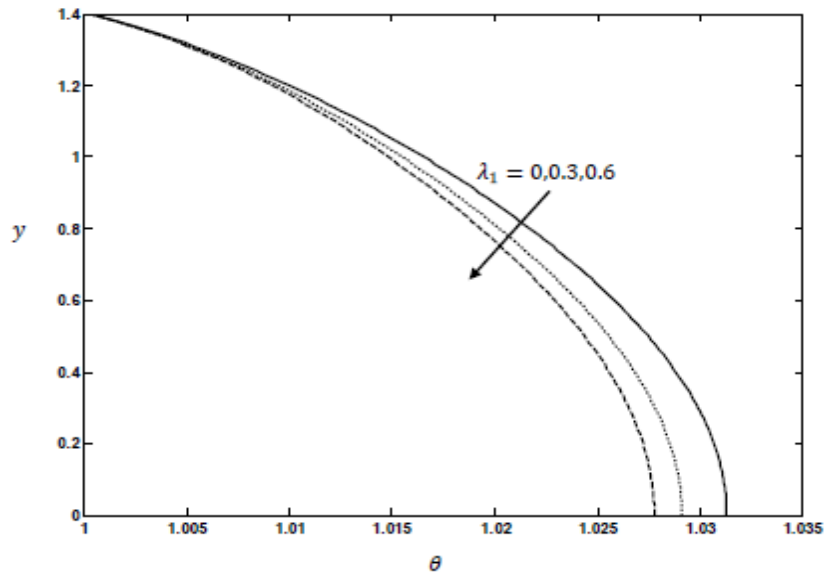


Fig. 8: Temperature profiles for different values of λ_1 with $\phi = 0.5$, $Da = 0.1$, $\bar{Q} = -1$, $Pr = 0.7$, $Ec = 0.1$, $R = 1$ and $\alpha = 0.1$.

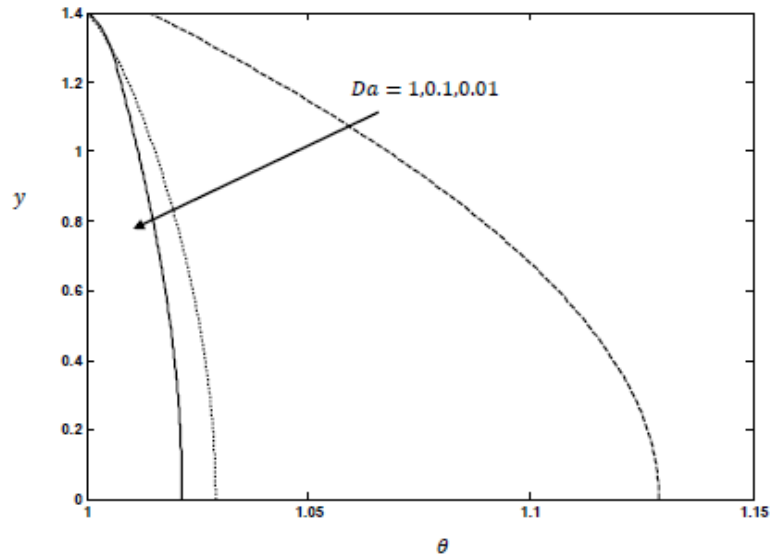


Fig. 9: Temperature profiles for different values of Da with $\phi = 0.5, \lambda_1 = 0.3, \bar{Q} = -1, Pr = 0.7, Ec = 0.1, R = 1$ and $x = 0.1$.

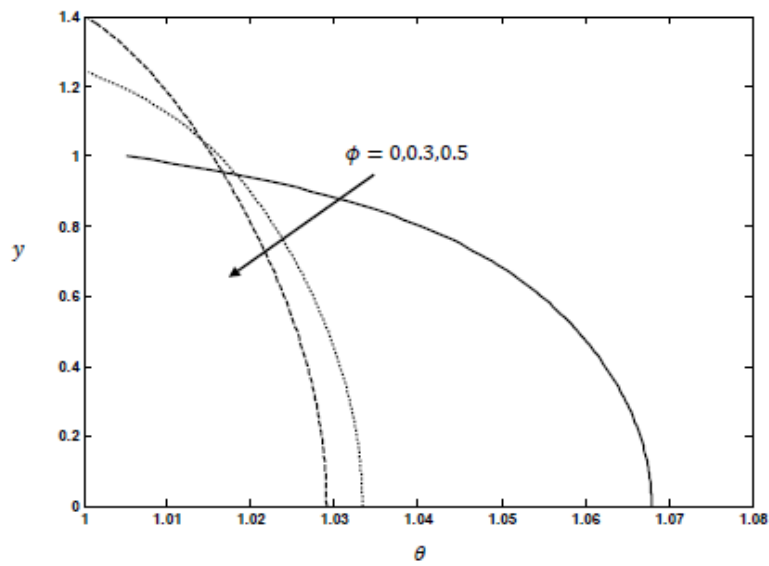


Fig. 10: Temperature profiles for different values of ϕ with $\lambda_1 = 0.3, Da = 0.1, \bar{Q} = -1, Pr = 0.7, Ec = 0.1, R = 1$ and $x = 0.1$.

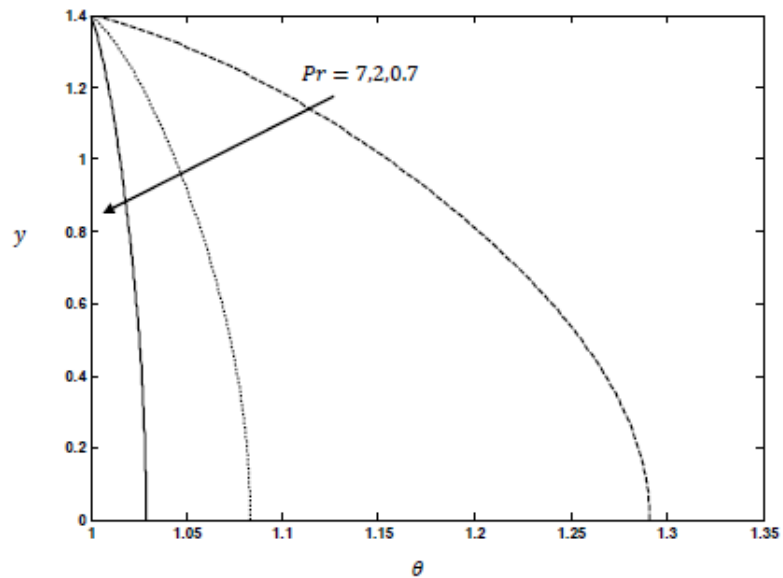


Fig. 11: Temperature profiles for different values of Pr with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, \lambda_1 = 0.3, Ec = 0.1, R = 1$ and $x = 0.1$.

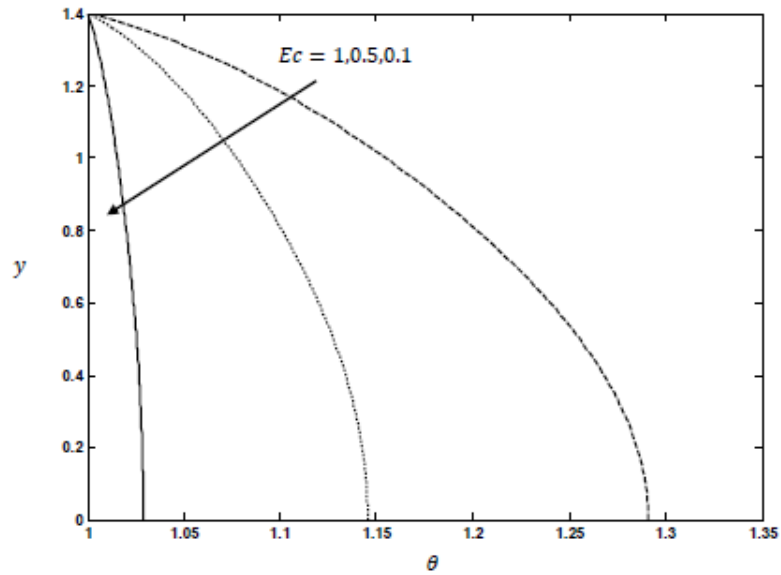


Fig. 12: Temperature profiles for different values of Ec with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, \lambda_1 = 0.3, Pr = 0.7, R = 1$ and $x = 0.1$.

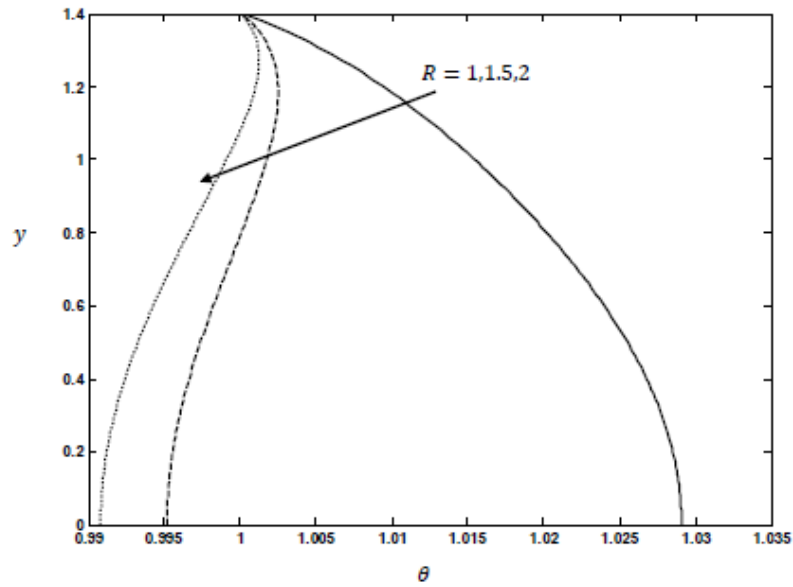


Fig. 13: Temperature profiles for different values of R with $\phi = 0.5, Da = 0.1, \bar{Q} = -1, \lambda_1 = 0.3, Ec = 0.1, Pr = 0.7$ and $x = 0.1$.

Table-1: The heat transfer coefficient Z at the upper wall $y = h$ for $x = 0.1$ and $\bar{Q} = -1$.

λ_1	Da	Pr	Ec	ϕ	R	Z
0.3	0.1	0.7	0.1	0.5	1	0.6358
0.5	0.1	0.7	0.1	0.5	1	0.6369
0.3	1	0.7	0.1	0.5	1	0.5293
0.3	0.1	1	0.1	0.5	1	0.8214
0.3	0.1	0.7	0.5	0.5	1	0.5214
0.3	0.1	0.7	0.1	0.6	1	0.6577
0.3	0.1	0.7	0.1	0.5	2	1.6086

REFERENCES

1. Bowman, H. F. Heat Trans. Med. Biol., 1(1985), 193.
2. EL Shehawey, E.F., Mekheimer, Kh. S., Kaldas, S. F. and AFIFI, N. A. S. Peristaltic transport through a porous medium, J. Biomath., 14 (1999).
3. EL Shehawey, E.F., Sobh, A.M.F. and Elbarbary, E.M.E. Peristaltic motion of a generalized Newtonian fluid through a porous medium, . Phys. Soc. Jpn., 69(2000), 401-407.
4. Field, B and Franconi, C. Physics and Technology of Hyperthermia, Martinus Nijhoff Publishers, Dordrecht, 1987.
5. Jaffrin, M.Y. and Shapiro, A.H. Peristaltic Pumping, Ann. Rev. Fluid Mech., 3(1971), 13-36.
6. Kothandapani, M. and Srinivas, S. On the influence of wall properties in the MHD peristaltic transport with Heat Transfer and porous medium, Phys. A., 372(2008), 4586-4591.
7. Latham, T.W. Fluid motions in peristaltic pump, M.S. Thesis, MIT, Cambridge, Massachusetts, 1966.
8. Mahmoud, S.R., Afifi, N.A.S. and Al-Isede, H.M. Effect of porous medium and magnetic field on peristaltic transport of a Jeffrey fluid, Int. J. Math. Analysis, 5(2011), 1025-1034.
9. Mekheimer K.H.S. Non linear peristaltic transport through a porous medium in an inclined planar channel, J. Porous Media, 6(2003), 190-202.
10. Mekheimer K.H.S. and ABD Elmaboud, Y. The influence of heat transfer and magnetic field on peristaltic transport of a Newtonian fluid in a vertical annulus: Application of an endoscope, Physics Letters A, 372(2008), 1657-1665.
11. Raptis, A. and Peridikis, C. Flow of a viscous fluid through a porous medium bounded by vertical surface, Int. J. Engng. Sci., 21(1983). 1327-1330.
12. Ravindranath Reddy, G., Ravi Kumar, S. and Raju, G.S.S. Influence of heat transfer on peristaltic flow of Jeffrey fluid through a porous medium in an inclined asymmetric channel, ARPN Journal of Engineering and Applied Sciences 12(9)(2017), 2962-2971.
13. Scheidegger, A. E. The physics of through porous media, McGraw-Hill, New York, 1963.
14. Srivastava, L.M. and Srivastava, V.P, Peristaltic transport of blood: Casson model II, J.Biomech., 17(1984), 821-829.
15. Subba Reddy, M. V. and Nadhamuni Reddy, C. Peristaltic flow of a non-Newtonian fluid through a porous medium in a tube with variable viscosity using Adomian decomposition method, International Review of Applied Engineering Research, 4(1)(2014), 137-146.
16. Vajravelu, K., Radharishnamacharya, G. and Radhakrishna Murthy, V. Peristaltic flow and heat transfer in a vertical porous annulus, with long wave approximation, Int. J. Non-Linear Mech., 42(2007), 754 – 759.
17. Varshney, C. L. The fluctuating flow of a viscous fluid through a porous medium bounded by a porous and horizontal surface, Indian. J. Pure and Appl. Math., 10(1979), 1558.
18. Vasudev, C., Rajeswara Rao, U., Subba Reddy, M. V. and Prabhakara Rao, G. Influence of magnetic field and heat transfer on peristaltic flow of Jeffrey fluid through a porous medium in an asymmetric channel, ARPN Journal of Engineering and Applied Sciences, 5(12)(2010), 87-103.

Source of support: Nil, Conflict of interest: None Declared.

[Copy right © 2018. This is an Open Access article distributed under the terms of the International Journal of Mathematical Archive (IJMA), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.]